TRUBUILD
WATER PROOFING COMPOUND

Trubuild WPC (Water Proofing Compound) is a single component water dilute-able protective coating to be applied over exterior surface of walls to prevent entry of water and moisture through the surface.

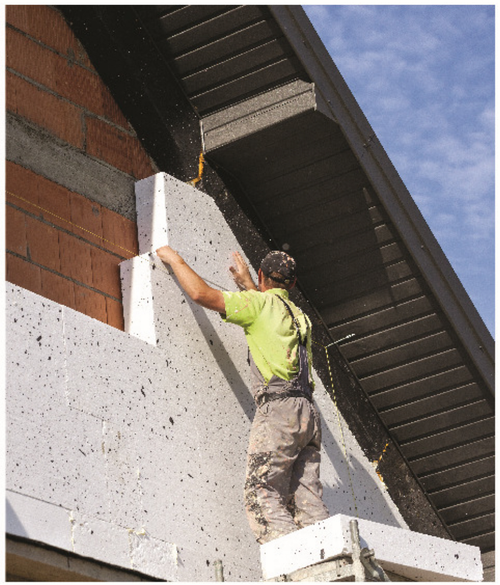

APPLICATIONS

- It can be used for water storage tanks.
- It can be used for terrace gardens.
- It can be used for bathroom ducts.
- It can be used for coating on exterior surface of building.

ADVANTAGES

- It is an Acrylic emulsion with water proofing applications.
- Upon drying, it forms a thick, seamless, durable membrane thus offering ultimate water proofing.

TRUBUILD WATER PROOFING

TECHNICAL INFORMATION

PROPERTIES	STANDARD	RESULTS
Physical State		low viscous liquid
Appearance		Opaque
Color		White (Dry cement color can also be added to make desired shades)
Viscosity @25°C	ASTM D-2196-10	800-1200
Drying Time		3-5 Minute (Complete curing after 24 hours)
Coverage		6-8 Sq. meter/kg (Brush Application)
Compressive Strength	IS: 2645: 2003	As Per The Standard

STORAGE

Product should be stored in a dry place in its original, properly closed containers at temperature between 2° - 40° C. Partially emptied container should be closed immediately.

SHELF LIFE

1.5 Year.

HANDLING PRECAUTIONS

Mandatory and recommended industrial hygiene procedures should be followed whenever products are being handled and processed. For additional information please refer the corresponding product data sheets.

PACKING

250 gm, 500 gm, 1 kg, 5 kg & 20 kg

Thakorji DISTRIBUTORS +91 95375 65835